




- |  |  |
|--|--|
| <ol style="list-style-type: none"> <li>1. (2) 5.25" external optical disk drive bays<br/>(2) 3.5" internal hard drive bays</li> <li>2. 320-watt standard efficiency power supply, Active Power Factor Correction (PFC)<br/>Optional: 89% efficient energy saving power supply</li> <li>3. (1) 3.5" external bay for optional HP 22-in-1 Media Card Reader, pocket media drive, or other 3.5" device</li> <li>4. Rear I/O: (6) USB 2.0, (1) standard serial port, (1) optional serial port, (1) optional parallel port, (2) PS/2, (1) RJ-45, (1) VGA, (1) audio in, (1) audio out, (1) DisplayPort</li> </ol> | <ol style="list-style-type: none"> <li>5. Front I/O: (4) USB 2.0, headphone and microphone, Dual Color Diagnostic LEDs</li> <li>6. (1) full-height PCI slot, (2) full-height PCIe x1 slots, (1) full-height PCIe x16 slot</li> <li>7. HP Optical Scroll Mouse (PS/2 or USB), or HP USB Laser Mouse</li> <li>8. HP Standard Keyboard (PS/2 or USB) or HP USB Smartcard Keyboard</li> <li>9. HP monitor (sold separately)</li> </ol> |
|--|--|



Ultra-Slim Desktop

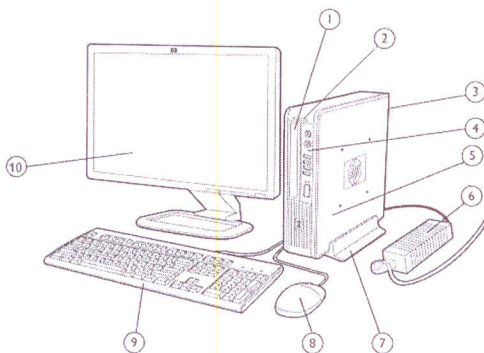

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. Optical Disc Drive</li> <li>2. Optional Secure Digital (SD) Card Reader</li> <li>3. Rear I/O: (6) USB 2.0 ports, DisplayPort and VGA video interfaces, PS/2 mouse and keyboard ports, RJ-45 network interface, audio in/out jacks</li> <li>4. Front I/O: (4) USB 2.0 ports, dedicated headphone output, and a microphone/headphone jack</li> </ol> | <ol style="list-style-type: none"> <li>5. (1) 2.5" internal hard disk drive bay</li> <li>6. 135W 87% efficient external Power Adapter</li> <li>7. HP USDT Tower Stand (sold separately)</li> <li>8. HP Optical Mouse</li> <li>9. HP Keyboard</li> <li>10. HP Monitor (sold separately)</li> </ol> |
|--|---|

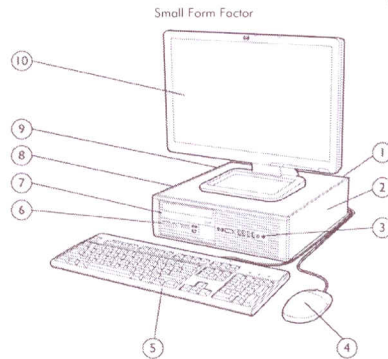

- |  |   |
|--|---|
| <ol style="list-style-type: none"> <li>1. Rear I/O: (6) USB 2.0, (1) standard serial port, (1) optional serial port, (1) optional parallel port, (2) PS/2, (1) RJ-45, (1) VGA, audio in/out, (1) DisplayPort</li> <li>2. (1) low profile PCI slot, (2) low profile PCIe x1 slots, (1) low profile PCIe x16 slot</li> <li>3. Front I/O: (4) USB 2.0, headphone and microphone, Dual Color Diagnostic LEDs</li> <li>4. HP Optical Scroll Mouse (PS/2 or USB), or HP USB Laser Mouse</li> <li>5. HP Standard Keyboard (PS/2 or USB) or HP USB Smartcard Keyboard</li> </ol> | <ol style="list-style-type: none"> <li>6. (1) 3.5" external bay for optional HP 22-in-1 Media Card Reader, pocket media drive, or other 3.5" device</li> <li>7. (1) 5.25" external bay for optional optical drive, or other 5.25" device (bay lifts up for device removal and insertion)</li> <li>8. (1) 3.5-inch internal drive bay supporting primary hard disk drive</li> <li>9. 240-watt standard efficiency power supply<br/>Optional: 89% efficient energy saving power supply</li> <li>10. HP Monitor (sold separately)</li> </ol> |
|--|---|



## At A Glance

- The HP Compaq 6005 Pro Business PC is a high performance PC with energy efficient features designed to exceed expectations and deliver results without compromise
- AMD 785G chipset with integrated ATI Radeon HD 4200 graphics supporting DirectX 10.1
- Side Port Memory for increased power savings and increased graphics performance
- Standard dual display support (DisplayPort and VGA)
- AMD Phenom™ II Quad-Core, Triple-Core, and Dual-Core processors; AMD Athlon™ II Dual-Core processors; AMD Sempron™ processor; all processors with AMD-V support
- Embedded TPM 1.2 compliant security module\* (Vista Bit-Locker ready)
- Support for up to 500-GB SATA 3.0Gb/s Smart IV hard drives
- Value-added software on select models
  - HP Support Assistant
  - HP Software Agent
  - McAfee Anti-Virus with 60 day Live Update Subscription
  - HP Vision Diagnostics software
  - Microsoft Office 2007
  - PDF Complete
  - Computrace Enabler for Desktops (select countries)
  - HP System Software manager
  - HP Power Assistant
  - Firefox- HP Virtual Browser
- Value-added software available for free download from the Web (<http://www.hp.com/go/easydeploy>)
  - HP Client Automation Starter \*\*
  - HP SoftPaq Download Manager
  - HP System Software Manager
  - HP Client Catalog for Microsoft SMS
- Fully compatible software OS image across all models (Microtower, Small Form Factor)
- HP BIOS for security, manageability and software image stability
- Protected by HP Services, including standard warranties up to 5-5-5 (terms and conditions vary by country; certain restrictions and exclusions apply)
- Selected configurations with global availability easily set up and ordered through HP.com Business to Business portals (<http://h10019.www1.hp.com/business-site/index.html>)
- Tailored HP Factory Express deployment and lifecycle services available (<http://h71028.www7.hp.com/enterprise/cache/976SS-0-0-225-121.aspx>)

\*TPM module disabled where use is restricted by law; for example, Russia.  
\*\* Available from HP Sales Representative or HP Channel Partner.



# QuickSpecs

HP Compaq 6005 Pro Business PC

Standard Features and Configurable Components (availability may vary by country)

Operating System – One of the following	Preinstalled	Genuine Windows 7 Professional Edition 32* Genuine Windows 7 Professional Edition 64* Windows XP Professional (available through downgrade rights from Genuine Windows 7 Professional)** Genuine Windows 7 Home Premium Edition 32* Genuine Windows 7 Home Premium Edition 64* Genuine Windows 7 Home Basic Edition 32* Genuine Windows Vista Business 32** Genuine Windows Vista Home Basic 32** Windows XP Professional (available through downgrade rights from Genuine Windows Vista Business)**†† Novell SUSE Linux Enterprise Desktop 1†† FreeDOS
	Supported	Genuine Windows 7 Enterprise Edition (32-bit)** Genuine Windows 7 Enterprise Edition (64-bit)** Genuine Windows Vista Business 64** Genuine Windows Vista Enterprise 32** Genuine Windows Vista Enterprise 64**
	Certified	Novell SUSE Linux Enterprise Desktop 1†† Red Hat Enterprise Linux††

NOTE: Windows XP Mode, available as a separate download for Windows 7 Professional, works with virtualization software such as Windows Virtual PC to run older Windows XP business software on the Windows 7 desktop.

\* Offered when Windows 7 is generally available. System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

\*\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereq.mspx> and: <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

+ Windows 7 Professional disk may also be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

+ Windows Vista Business disk may also be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order annually at least 25 customer systems with the same custom image.

† The following features are not supported by Novell SUSE Linux Enterprise Desktop:

- HP 22-in-1 Media Card Reader with PCI Card
- HP ProtectTools
- SATA Blu-ray Writer playback of commercial movies
- Broadcom NetXtreme Gigabit Ethernet PCIe NIC Plus Card (DASH functionality)
- HP 802.11b/g/n Wireless PCIe x1 Half Mini Card



# QuickSpecs

HP Compaq 6005 Pro Business PC

Standard Features and Configurable Components (availability may vary by country)

- HP TV Tuner Mini PCIe Card
- 2nd serial port adapter (including low profile)
- Power Management features (US ENERGY STAR)

†† The following features are not supported by Red Hat Enterprise Linux:

- HP 22-in-1 Media Card Reader with PCI Card
- Integrated 1.2 TPM Embedded Security Chip
- Broadcom NetXtreme Gigabit Ethernet PCIe NIC Plus Card (DASH functionality)
- LSI PCIe x1 Hi-Speed 56K International SoftModem
- HP FireWire / IEEE 1394 PCI Card (full height and low profile)
- 2nd serial port adapter (including low profile)
- HP 802.11b/g/n Wireless PCIe x1 Card
- HP 802.11b/g/n Wireless PCIe x1 Half Mini Card
- HP TV Tuner Mini PCIe Card
- HP USB Smartcard Keyboard
- Power Management features (US ENERGY STAR)

Value-added Software (on select models; not included with FreeDOS)	HP Software Agent HP Support Assistant HP Systems Software Manager HP Vision Diagnostics HP Power Assistant McAfee Total Protection Anti-Virus with 60 day trial Subscription Roxio Creator Business (select models) Firefox-HP Virtual Browser SRS Premium Sound Software for HP Thin USB Powered Speakers (select models)	Microsoft Office 2007 Basic Microsoft Office 2007 Personal Microsoft Office 2007 Professional Microsoft Office 2007 Small Business Edition Integrated DASH 1.1 Manageability CompuTrace Enabler for Desktops (select countries)* HP Skyroom (trial version) Corel WinDVD (select models) Norton Online Backup
	* Requires HP Lock Pro for ProtectTools for full functionality. Tracking and tracing subscription sold separately.	

Value-added Software (available for free download from the Web <a href="http://www.hp.com/go/eosdisplay">http://www.hp.com/go/eosdisplay</a> )	HP Client Automation Starter* HP Client Manager from Symantec HP SoftPaq Download Manager	HP Client Catalog for Microsoft SMS HP Systems Software Manager HP Disk Sanitizer, External Edition
	* Available from HP Sales Representative or HP Channel Partner.	

Value-added Services and Features	HP Stable Platform Program Business-to-Business Portals HP Global Series Services	Factory Express Deployment and Lifecycle Services TPM 1.2 Security chip*
	* TPM module disabled where use is restricted by law; for example, Russia.	



# QuickSpecs

HP Compaq 6005 Pro Business PC

Standard Features and Configurable Components (availability may vary by country)

Service and Support	On-site Warranty and Service <sup>Note 1</sup> : This limited warranty and service offering delivers parts, labor and on-site repair for terms up to 5 years. Response time is next business-day <sup>Note 2</sup> and includes free telephone support <sup>Note 3</sup> 24 x 7. Global coverage <sup>Note 2</sup> ensures that any product purchased in one country and transferred to another non-restricted country will remain fully covered under the original warranty and service offering. Some countries/regions do not offer one year onsite and labor. For HP Care Pack services see: <a href="http://www.hp.com/go/lookuptool">http://www.hp.com/go/lookuptool</a> .		
	NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply. NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country. NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling end 24 x 7 support may not be available in some countries.		

	Microtower	Small Form Factor	Ultra-Slim Desktop
Chassis Dimensions (H x W x D)	14.85 x 6.95 x 16.96 in 377.2 x 176.5 x 430.8 mm	3.95 x 13.30 x 14.90 in 100.3 x 337.8 x 378.5	2.6 x 9.9 x 10 in 66 x 251.5 x 254 mm
Optional Tower Stand Dimensions (H x W x D)	N/A	1.05 x 6.95 x 7.83 in (26.75 x 176.46 x 198.87 mm)	1.07 x 4.92 x 6.69 in 27.2 x 124.9 x 169.9 mm
System weight*	20.5 lb (9.3 kg)	16.0 lb (7.26 kg)	6.75 lb (3.07 kg)
System volume	1739 cu in	782.77 cu in (12.8 liters)	257.5 cu in
Shipping weight*	28.79 lb (13.06 kg)	26.70 lb (12.11 kg)	14.42 lb (6.54 kg)
Maximum supported weight (desktop orientation)	N/A	77.1 lb (35 kg)	77 lb (35 kg)
Shipping box dimensions (H x W x D)	19.69 x 12.2 x 23.62 in 500 x 310 x 600 mm	9.72 x 19.68 x 22.67 in 246.9 x 499.9 x 575.8 mm	8.60 x 15.68 x 19.68 in 218.4 x 398.3 x 499.9 mm
* Configured with 1 hard drive, 1 optical drive, no diskette drive, and no PCI card.			
Power Supply	320W power supply – active PFC 240W power supply – active PFC		
Energy Efficient Power Supply	320W 89% efficient power supply – active PFC 240W 89% efficient power supply – active PFC 135W 87% efficient – active PFC		

Ports	10 (4 front, 6 rear)
USB 2.0	10 (4 front, 6 rear)
Serial	1 standard with 2 <sup>nd</sup> optional on MT and SFF; none on USDT
Parallel	1 optional on MT and SFF; none on USDT
PS/2	1 keyboard, 1 mouse
Video	VGA and DisplayPort for integrated graphics available via HP DisplayPort to DVI-D Adapter
DVI output	1 Standard DisplayPort and 1 Standard VGA
Support for Multi-Monitor	Integrated High Definition audio with internal speaker
Audio	Front – mic and headphone Rear – input (supports microphone or line input), line out
NIC (RJ-45)	Integrated Broadcom NetXtreme Gigabit Ethernet BCM 5761



# QuickSpecs

HP Compaq 6005 Pro Business PC

Standard Features and Configurable Components (availability may vary by country)

Chipset	AMD 785G chipset	MT	SFF	USDT
		X	X	X
Processor	AMD Sempron Processors with HyperTransport™ Technology:			
One of the following	AMD Sempron 140 Processor (2.7 GHz, 1 MB L2 cache, HT bus 3.0)	X	X	
	AMD Sempron 145 Processor (2.8 GHz, 1 MB L2 cache, HT bus 3.0)			X
	AMD Athlon II Dual-Core Processors with HyperTransport Technology:			
	AMD Athlon II X2 215 Processor (2.7 GHz, 1 MB L2 cache, HT bus 3.0)	X	X	
	AMD Athlon II X2 220 Processor (2.8 GHz, 1 MB L2 cache, HT bus 3.0)			X
	AMD Athlon II X2 B22 Processor (2.8 GHz, 2 MB L2 cache, HT bus 3.0)	X	X	X
	AMD Athlon II X2 B24 Processor (3.0 GHz, 2 MB L2 cache, HT bus 3.0)	X	X	X
	AMD Athlon II X2 B26 Processor (3.2 GHz, 2 MB L2 cache, HT bus 3.0)			X
	AMD Athlon II X4 605e Processor (2.3 GHz, 2 MB L2 cache, HT bus 3.0)			X
	AMD Phenom II Dual-Core Processors with HyperTransport Technology:			
	AMD Phenom II X2 B53 Processor (2.8 GHz, 1 MB L2 cache, 7 MB Total cache, HT bus 3.0)	X	X	
	AMD Phenom II X2 B55 Processor (3.0 GHz, 1 MB L2 cache, 7 MB Total cache, HT bus 3.0)	X	X	
	AMD Phenom II Triple-Core Processors with HyperTransport Technology:			
	AMD Phenom II X3 B73 Processor (2.8 GHz, 1.5 MB L2 cache, 7.5 MB Total cache, HT bus 3.0)	X	X	
	AMD Phenom II X3 B75 Processor (3.0 GHz, 1.5 MB L2 cache, 7.5 MB Total cache, HT bus 3.0)	X	X	
	AMD Phenom II Quad-Core Processors with HyperTransport Technology:			
	AMD Phenom II X4 910e Processor (2.6 GHz, 2 MB L2 cache, 8 MB Total cache, HT bus 3.0)			X
	AMD Phenom II X4 B93 Processor (2.8 GHz, 2 MB L2 cache, 8 MB Total cache, HT bus 3.0)	X	X	
	AMD Phenom II X4 B95 Processor (3.0 GHz, 2 MB L2 cache, 8 MB Total cache, HT bus 3.0)	X	X	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

**Memory**  
Supports un-buffered non-ECC DDR3 SDRAM. AMD processors support un-buffered non-ECC DDR3 SDRAM (synchronous dynamic random access memory) at a frequency of up to 1333 MHz.

NOTE: The actual memory speed for DDR3 SDRAM depends on the processor and memory configuration.

System memory upgrades are accomplished by adding DDR3 SDRAM module(s) to empty DIMM slots on the system board.

CAUTION: Voltage is supplied to the memory modules whenever the computer is connected to an active AC outlet. Adding or removing memory modules while voltage is present may cause irreparable damage to the memory modules or system board. The computer must be shut down with the AC power removed (disconnect AC power cord at rear chassis or at AC outlet) prior to adding or removing SDRAM modules.

HP recommends dual-channel configurations for the best memory performance. For best performance, add memory to each memory channel and do not inter-mix memory module speeds. If memory module speeds are inter-mixed, the memory operating frequency will default to the slowest speed.

### Ultra-slim Desktop

**Maximum Memory\*** Supports up to 8 GB of DDR3 SDRAM using SO-DIMM modules. Not all memory configurations possible are represented below.

NOTE: For systems configured with more than 3 GB of memory and a 32-bit operating system, all memory may not be available due to system resource requirements.

SO-DIMM Size	Slot	
	Channel A (black)	Channel B (white)
1 GB	1 (white)	2 (white)
2 GB (dual channel)	1 GB	1 GB
4 GB (dual channel)	2 GB	2 GB
8 GB (dual channel)	4 GB	4 GB

### Microtower and Small Form Factor

**Maximum Memory\*** Supports up to 16 GB of un-buffered non-ECC DDR3 SDRAM.

The DIMM connectors for Channel A slot 3 and Channel B slot 4 are black and these slots must always be populated first in the channel. Not all possible memory configurations are represented in the table below.

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

NOTE: For systems configured with more than 3GB of memory and a 32-bit operating system, all memory may not be available to the OS due to system resource requirements. Adding more memory above 4GB requires a 64-bit operating system.


Total Memory	DIMM Slot Population			
	Channel A		Channel B	
	1 (white)	3 (black)	2 (white)	4 (black)
1-GB (Single Channel)				1GB
2-GB (Dual Channel)		1GB		1GB
3-GB (Dual Channel)		2GB		1GB
4-GB (Dual Channel)		2GB		2GB
4-GB (Dual Channel)	1GB	1GB	1GB	1GB
8-GB (Dual Channel)	2GB	2GB	2GB	2GB
16-GB maximum (Dual Channel)	4GB	4GB	4GB	4GB

Expandability	Microtower	Small Form Factor	Ultra-Slim Desktop
5-volt PCI slots	1 full-height	1 low-profile	0
Max power per slot	35W	35W	NA
PCIe x1 slot	2	2	0
Max power per slot	10W	10W	NA
PCIe x16 slot	1 full-height	1 low-profile	0
Max power per slot	75W	35W	NA
Mini-PCIe x1 slot	0	0	1
Max power per slot	NA	NA	9.8W
External Bays			
3.5"	1	1	0
5.25"	2	1	0
Slimline ODD	0	0	1
IDE			
Internal 3.5" HDD Bays	2	1	0
Internal 2.5" HDD Bay	0	0	1
Hard Drive Controller (SATA) Supported	SATA	SATA	SATA
Hard Drive Interfaces Supported	SATA 3.0Gb/s	SATA 3.0Gb/s	SATA 3.0Gb/s

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

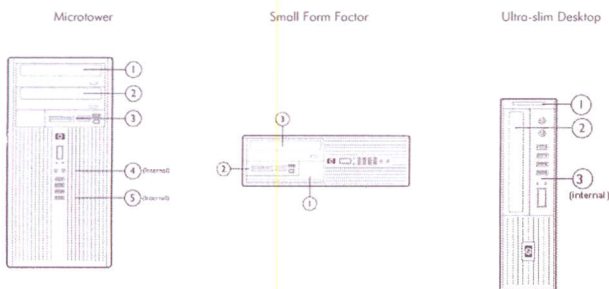

Storage - Drive Support	Microtower			Small Form Factor			USDT		
	Media Card Reader or Pocket Media Drive (optional)	5.25" Serial ATA Devices	3.5" Serial ATA Devices	Media Card Reader or Pocket Media Drive (optional)	5.25" Serial ATA Devices	3.5" Serial ATA Devices	SDR	ODD	HDD, SSD
Quantity Supported	1	2	2	1	1	2	1	1	1
Position Supported	3	1,2	3,4,5	2	3	2,3	1	2	3

NOTE: The SATA port labeled SATA3 on the system board can be enabled by the BIOS as an eSATA port. Using it for an eSATA drive will require a separately purchased cable with an eSATA connector.

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

Hard Drive	250-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)	2.5" 250-GB SATA 3.0Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ Smart IV)	500-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 7200 RPM, NCQ, Smart IV)	80-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)	3.5" Removable 160-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)	3.5" Removable 250-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)	3.5" Removable 500-GB SATA 3.0 Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)	2nd hard drive, 250-GB SATA 3.0-Gb/s Hard Drive (8MB Cache, 7200 RPM, NCQ, Smart IV)	2nd hard drive, 500-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 7200 RPM, NCQ, Smart IV)	2nd hard drive, 80-GB SATA 3.0-Gb/s Hard Drive (16MB Cache, 10,000 RPM, NCQ, Smart III)	MT	SFF	USDT
											X	X	
One or two of the following													X
					X	X							X
				X	X								X
			X	X	X	X							X
			X	X	X	X							X
			X	X	X	X							X
			X	X	X	X							X
			X	X	X	X							X
			X	X	X	X							X
			X	X	X	X							X

**Solid State Drive**  
64-GB Solid State Drive  
80-GB Solid State Drive  
RapidDrive

NOTE: RapidDrive is an optional new productivity solution available only on the HP Compaq 6005 Pro SFF and MT. It links the Solid State Drive (SSD) and Hard Drive together to form one virtual drive that combines the advantages of both technologies. Pre-installed applications reside on the SSD for reduced access time, yet the usual limitations of SSD storage are eliminated by linking it with a large hard drive.

MPI/PGJ  
RUB...  
Matr. n°...

CITACAO  
VALSPE

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

Removable Storage – One or more of the following depending on form factor (see Storage Drive Support section above)	Packet Media Drive				
	250GB Packet Media Drive	X	X	X	
	Media Reader				
	HP 22-in-1 Media Card Reader (USB connection on the system board)	X	X		
	HP 22-in-1 (with 1394) Media Card Reader (USB connection on the system board)	X	X		
	Secure Digital (SD) HC Reader			X	
	Optical Drives				
	SATA DVD-ROM Drive	X	X		
	SATA SuperMulti DVD Writer Drive	X	X		
	SATA Blu-ray Writer	X	X		
Security	HP Slim DVD-ROM Drive			X	
	HP Slim SuperMulti DVD Writer Drive			X	
	TPM 1.2 Embedded Security Chip*	X	X	X	
	HP Desktop Security lock kit (lock and cable)	X	X	X	
	HP Chassis Security Kit	X	X	X	
	Security cable with Kensington lock	X	X	X	
	HP Solenoid Hood Lock and Sensor	X	X		
	HP (USDIT) Hood Sensor			X	
	Optional HP ProtectTools 5.0 security software suite	X	X	X	
	Optional LockJack Pro tracking and tracing subscription	X	X	X	
NIC	Optional USB Port Disable at factory (user configurable via BIOS)	X	X	X	
	RAID 0,1 support	X	X		
	* TPM module disabled where use is restricted by law; for example, Russia.				
	Broadcom NetXtreme Gigabit Ethernet BCM 5761 (integrated on system board)	X	X	X	
	Broadcom NetXtreme Gigabit Ethernet Plus PCIe NIC	X	X		
	Wireless	HP 802.11 b/g/n Wireless PCIe x1 card (full height bracket)	X		
		HP 802.11 b/g/n Wireless PCIe x1 card (low profile bracket)		X	
		HP 802.11 b/g/n Wireless PCIe x1 Half Mini Card (2x2)			X
	Modem	LSI PCIe x1 56K International SoftModem	X	X	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## After-Market Options (availability may vary by region)

Segment - Healthcare/Education	HP Chart Cart 1100d (6005 USDIT, Washable K&M, 19" Display)	MT	SFF	USDIT	Part Number
				X	QK789AA#ABA
Collaboration	PDF Complete Corporate Edition	X	X	X	WQ534AT
	HP Virtual Rooms (up to 5 people in one meeting) 1 Yearly License	X	X	X	WF722A#B1K
	HP Virtual Rooms (up to 15 people in one meeting) 1 Year License	X	X	X	WF723A#B1K
	HP Virtual Rooms (up to 25 people in one meeting) 1 Year License	X	X	X	WF724A#B1K
	HP Virtual Support Rooms (1 support representative seat) License	X	X	X	WF836A#B1K
	Wired Premium Headset (VoIP and SkyRoom Conf)	X	X	X	AQ704AA
	HP Business Digital Headset	X	X	X	QK550AA
	Thin USB Powered Speakers	X	X	X	KK912AA
	LCD Speaker Bar (Black)	X	X	X	NQ576AA
	Quick Release			X	EMB70AA
Memory	HP USB 2.0MP Business Webcam	X	X	X	NX252AA
	HP USB HD 720P Business Webcam	X	X	X	QP896AA
	1GB DDR3-1333 DIMM	X	X		AT023AA
	2GB DDR3-1333 DIMM	X	X		AT024AA
	4GB DDR3-1333 DIMM	X	X		VH638AA
	1GB DDR3-1333 SODIMM			X	VH639AA
	2GB DDR3-1333 SODIMM			X	VH640AA
	4GB DDR3-1333 SODIMM			X	VH641AA



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Standard Features and Configurable Components (availability may vary by country)

Graphics	Integrated ATI Radeon HD 4200 Graphics*				
	ATI Radeon HD 4650 (1 GB DH) PCIe x16 Graphics Card	X	X		
	ATI Radeon HD 4550 Dual Head PCIe x16 Graphics Card	X	X		
	NVIDIA Quadro NVS 290 PCIe x1 Graphics Card	X	X		
	NVIDIA Quadro NVS 290 (256MB DH) PCIe x16 Graphics Card	X	X		
	NVIDIA Quadro NVS 295 (256MB DH) PCIe x16 Graphics Card	X	X		
	NVIDIA GeForce 310 DP PCIe x16 Graphics Card	X	X		
	HP DisplayPort to VGA Adapter	X	X	X	
	HP DisplayPort to DVI-D Adapter	X	X	X	
	* Side Port memory: The AMD 785G chipset provides a Side Port memory interface for 128 MB of dedicated frame buffer DDR3 memory with a device width of x16 for the integrated graphics chip.				
Audio	Integrated High Definition audio with Realtek ALC261 codec (all ports are stereo)	X	X	X	
	Microphone and Headphone front ports	X	X	X	
	Line-out and Line-In rear ports*	X	X	X	
	Multistreaming capable*	X	X	X	
	Internal Speaker	X	X	X	
	HP Thin USB Powered Speakers (optional)	X	X	X	
	* Re-taskable ports; see technical specifications page 21.				
	Input Devices	Keyboard – One of the following			
		HP PS/2 Standard Keyboard	X	X	X
		HP USB Standard Keyboard	X	X	X
HP Smartcard Keyboard		X	X	X	
HP USB PS/2 Washable Keyboard		X	X	X	
HP USB Mini Keyboard		X	X	X	
Mouse – One of the following					
USB 2-Button Laser Mouse		X	X	X	
PS/2 2-Button Optical Scroll Mouse		X	X	X	
USB 2-Button Optical Scroll Mouse		X	X	X	
Miscellaneous	2 <sup>nd</sup> serial port adapter	X			
	2 <sup>nd</sup> serial port adapter (low profile)			X	
	Parallel port adapter	X	X		
	HP TV Tuner PCIe x1 Card	X	X		
	HP TV Tuner Mini PCIe Card			X	
	HP FireWire / IEEE 1394 Adapter	X	X		
	Tower stand	X	X		



# QuickSpecs

HP Compaq 6005 Pro Business PC

## After-Market Options (availability may vary by region)

Graphics	NVIDIA Quadro NVS 290 Dual Head PCIe x16, low profile Graphics Card	X	X		KG748AA
	NVIDIA NVS 300 DH PCIe x16 VGA Graphics Card	X	X		BV456AA
	AMD FirePro 2270 (512) VGA DH x16	X	X		QK551AA
	NVIDIA Quadro NVS 295 Dual Head PCIe x16 DDR3 Graphics Card	X	X		FY943AA
	NVIDIA GeForce 310 512MB Single Head PCIe x16 Graphics Card	X	X		VG885AA
	AMD Radeon HD 6450 DP (DVI-I) 512MB SH LP PCIe x16 Graphics Card (with a DP adapter it can do dual)	X	X		QM229AA
	ATI HD 4550 PCIe x16 (512MB/DDR3) Dual Head Graphics Card	X	X		SG764AA
	ATI HD 4650 DP (1GB/DDR3) Dual Head Graphics Card	X			VN566AA
	AMD HD 6570 DP 1GB DDR3 2DP, DVI-I	X			QP027AA
	HP DMSS9 DVI Dual-head Connector Cable	X			DL139A
Storage	HP 80GB SATA 3.5 Solid State Drive	X	X	X	BM848AA
	HP 160GB SATA X25-M SSD	X	X	X	WW915AA
	250GB SATA 3.0Gb/s SMART IV Hard Drive	X	X		PY278AA
	500GB SATA 3.0Gb/s SMART IV Hard Drive	X	X		KW347AA
	1TB SATA 3.0Gb/s SMART IV	X	X		VU353AA
	Slim 8X SATA DVD-ROM Slim Drive			X	VP033AA
	Slim 8X SATA Super Multi Slim Drive			X	VP034AA
	HP 16X SATA Blu-ray Writer	X	X		AR482AA
	16X/48X SATA DVD-ROM Drive	X	X		AR629AA
	16X SATA SuperMulti Drive	X	X		AR630AA
HP 22-in-1 Media Card Reader	X	X		AR941AA	
22-in-1 (with 1394) Media Card Reader	X	X		AR942AA	



# QuickSpecs

HP Compaq 6005 Pro Business PC

After-Market Options (availability may vary by region)

Cables, Adapters and Power	Super Speed USB 3.0 PCIe x1	X	X	X	BM867AA	
	HP FireWire / IEEE 1394a PCIe x1 Card	X	X	X	BW851AA	
	eSATA Adapter	X	X	X	FH966AA	
	USB to Serial Adapter, 3ft	X	X	X	EM449AA	
	2nd Serial Port	X	X		PA716A	
	Parallel Port Adapter	X	X		KD061AA	
	HP USB Graphics Adapter	X	X	X	NL571AA	
	DisplayPort to HDMI Adapter	X	X	X	BP937AA	
	DisplayPort TO DVI-D Adapter (single link)	X	X	X	FH973AA	
	DisplayPort TO VGA Adapter	X	X	X	AS615AA	
	DisplayPort Cable Kit (supports new Advantage Series Monitors launching 10/5 with DisplayPort connector not included in the box)	X	X	X	VN567AA	
	DisplayPort TO DVI-D Dual Link Adapter			X	NR078AA	
	DVI to DVI Cable	X	X		DC198A	
	HP Migration Cable for Windows 7	X	X	X	AY493AA	
	Local Area Network (LAN) cable, Ethernet cable	X	X	X	AH122AA	
	Firewire (1394) Cable	X	X	X	AH123AA	
	Slim 4-Port USB 2.0 Pocket Hub	X	X	X	PQ449AA	
	7-outlet Surge Protector	X	X	X	AG290AA#ABA	
	Networking and Communication	Wireless 802.11b/g/n PCIe x1 Card	X	X		FH971AA
		NIC - Broadcom NetXtreme Gigab Ethernet + PCIe	X	X		FS215AA
Intel PRO/1000 CT Network Connection (GbE PCIe x1 NIC)		X	X		FH969AA	

Input/Output Device	HP Digital Sketch	X	X	X	BU865AA
	HP Business Mouse Pad	X	X	X	AT485AA
	HP Multi-Purpose Cleaning Kit	X	X	X	BL528AA
	HP 2.4GHz Wireless Keyboard & Mouse	X	X	X	NB896AA#ABA
	HP PS/2 Optical Mouse/Keyboard Kit + Free Mousepad	X	X	X	KF886AA#ABA
	HP USB PS2 Washable Keyboard/Mouse US	X	X	X	BU207AA#ABA
	HP PS/2 2-Button Optical Scroll Mouse	X	X	X	EY703AA
	HP USB 2-Button Optical Scroll Mouse	X	X	X	DC172B
	HP USB 2-Button Laser Mouse	X	X	X	GW405AA
	HP PS/2 04 Standard Keyboard	X	X	X	DT527A#ABA
	HP USB 04 Standard Keyboard	X	X	X	DT528A#ABA
	HP USB SmartCard CCID Keyboard	X	X	X	BV813AA#ABA
	HP USB Mini Keyboard	X	X	X	AS601AA#ABA
	HP USB Optical Mini Mouse	X	X	X	RH304AA
	HP USB PS2 Washable Keyboard	X	X	X	VF097AA#ABA



DA - 13412 North America — Version 24 — April 12, 2011

Page 17

# QuickSpecs

HP Compaq 6005 Pro Business PC

After-Market Options (availability may vary by region)

Input/Output Device	HP USB PS2 Washable Scroll Mouse	X	X		
	HP USB Keyboard with USB Ports	X	X		
Input/Output Device	HP Single Monitor Arm	X	X	X	BT861AA
	USDT Integrated Work Center stand			X	GN783AA
	HP Integrated Work Center - Small Form Factor			X	GK549AA
	SFF Tower Stand			X	VN569AA
	USDT Tower Stand			X	VN568AA
Security	5.25" Blank Bezel Kit (Black 50/Bulk Pack)	X	X		VK889AA
Security	HP Chassis Security Kit	X	X		AR639AA
	Rear Port Controller Cover (Black)			X	VN571AA
	(CMT) Solenoid Lock and Hood Sensor	X			DE618A
	(SFF) Solenoid Lock and Hood Sensor			X	BP428AA
	Wall Mount/ security sleeve			X	VN570AA
	HP Business PC Security Lock Kit	X	X	X	PV606AA
	HP Keyed Cable Lock	X	X	X	BV411AA



DA - 13412 North America — Version 24 — April 12, 2011

Page 18

# QuickSpecs

HP Compaq 6005 Pro Business PC

Technical Specifications

Unit Environment and Operating Conditions	Microtower	Small Form Factor	Ultra-Slim Desktop
<b>General Unit Operating Guidelines</b>			
<ul style="list-style-type: none"> <li>Keep the computer away from excessive moisture, direct moisture and the extremes of heat and cold, to ensure that unit is operated within the specified operating range.</li> <li>Leave a 10.2 cm (4 in) clearance on all vented sides of the computer to permit the required airflow.               <ul style="list-style-type: none"> <li>Never restrict airflow into the computer by blocking any vents or air intakes.</li> <li>Do not stack computers on top of each other or place computers so near each other that they are subject to each other's recirculated or preheated air.</li> </ul> </li> <li>Occasionally clean the air vents on the front, back, and any other vented side of the computer. Lint, dust and other foreign matter can block the vents and limit the airflow.</li> <li>If the computer is to be operated within a separate enclosure, intake and exhaust ventilation must be provided on the enclosure, and the same operating guidelines listed above will still apply.</li> </ul>			
Temperature Range	Operating: 50° to 95° F (10° to 35° C) Non-operating: -22° to 140° F (-30° to 60° C)		
Relative Humidity	Operating: 10% to 90% (non-condensing at ambient) Non-operating: 5% to 95% (non-condensing at ambient)		
Maximum Altitude (unpressurized)	Operating: 10,000 ft (3048 m) Non-operating: 30,000 ft (9144 m)		
* Operating temperature is de-rated 1.0 deg C per 300 m (1000 ft) to 3000 m (10,000 ft) above sea level, no direct sustained sunlight. Maximum rate of change is 10 deg C/hr. The upper limit may be limited by the type and number of options installed.			

	Microtower	Small Form Factor	Ultra-Slim Desktop
Power Supply	320-watt BTX power supply - Active PFC	320-watt 89% efficient* BTX power supply - Active PFC	240-watt BTX power supply - Active PFC
Operating Voltage Range	100-240VAC	100-240VAC	100-240VAC
Rated Voltage Range	115V/230V	115V/230V	115V/230V
Rated Line Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Operating Line Frequency Range	47-63 Hz	47-63 Hz	47-63 Hz
Rated Input Current	5.5A	5.5A	4A
Power Supply Fan	Variable speed fan	Variable speed fan	Variable speed fan
ENERGY STAR Compliant		X	
External Power Adapter			
Dimensions	6.7 x 2.6 x 1.5 in		
Total Cord Length	12 ft 8 in		

\* Energy efficient power supply is a requirement for ENERGY STAR qualification in conjunction with a select range of processors and modules  
 \*\* Power consumption in the Off/Apparent Off mode is measured and reported with the network interface controller "Wake on LAN" feature disabled in F10 Setup. (default is "enabled").



DA - 13412 North America — Version 24 — April 12, 2011

Page 19

# QuickSpecs

HP Compaq 6005 Pro Business PC

Technical Specifications

Other Features	Description
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>Allows the system to wake from a low power mode.</li> <li>Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.</li> </ul>
SMBIOS Ver. 2.6	System Management BIOS, previously known as DMI BIOS, for system management information
Dual-State Power Button	Power button acts as both an on/off button and suspend-to-sleep button

ROM BIOS Information
Key features of the HP BIOS include: <ul style="list-style-type: none"> <li>Deployment and manageability - HP BIOS provides several technologies that help integrate the HP Business desktop computer into the enterprise, such as PXE, remote configuration, remote control, and F10 Setup support for 12 languages.</li> <li>Stability - HP BIOS supports the HP stable product roadmap by releasing only critical BIOS changes to the factory and advanced change notification.</li> <li>Security - HP BIOS offers a robust and flexible set of security features to help the system administrator secure their systems from removal of sensitive data, and help prevent access by unauthorized users. Ability to disable USB ports.</li> <li>Tracking and tracing capabilities in case of theft available in select countries (subscription sold separately).</li> <li>Thermal and power management - The HP BIOS provides and enables thermal and power management technologies to assist in operating the HP Business Desktop computer in any enterprise environment.</li> <li>Serviceability - HP BIOS provides diagnostic and detailed service information.</li> <li>Upgrades and recovery - HP BIOS provides numerous ways to upgrade HP Business Desktop computers, including BIOS updates from within DOS (Flashfile), BIOS updates from within Windows (HPQFlash, SSM), HP Client Manager, and fail-safe recovery. In addition, the HP Business Desktop BIOS Utilities tool enables replicated BIOS setup throughout the Enterprise; it is available from within the BIOS software and from the support website.</li> </ul>
Additional HP BIOS Features <ul style="list-style-type: none"> <li>Administrator password - Also known as the setup password, this helps prevent unauthorized changes to the system configuration. If the administrator password is not known, the BIOS version cannot be changed and changes cannot be made to BIOS settings using F10 setup or under the OS.</li> <li>Mute internal speaker</li> <li>Disable USB ports, SATA ports, mini-PCIe slot, and integrated NIC</li> </ul>



DA - 13412 North America — Version 24 — April 12, 2011

Page 20



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications

Serviceability Features of System		
Dual Color Power LED on Front of Computer (Indicates Normal Operations and Fault Conditions)		
Diagnostic LED Explanation Table		
	Number of 1-second red LED blinks followed by 2-second pause, then repeats:	
	2-processor thermal protection activated	
	3-processor not installed	
	4-power supply failure	
	5-memory error	
	6-video error	
	7-PCA failure (ROM detected failure prior to video)	
	8-invalid ROM, bootblock recover mode	
<ul style="list-style-type: none"> <li>System/Emergency ROM</li> </ul>	<ul style="list-style-type: none"> <li>Flash ROM</li> </ul>	<ul style="list-style-type: none"> <li>CMOS Battery Holder for easy Replacement</li> </ul>
<ul style="list-style-type: none"> <li>Flash Recovery with Video</li> </ul>	<ul style="list-style-type: none"> <li>5 Aux Power LED on System PCA</li> </ul>	<ul style="list-style-type: none"> <li>Processor ZIF Socket for easy Upgrade</li> </ul>
<ul style="list-style-type: none"> <li>Over-Temp Warning on Screen</li> </ul>	<ul style="list-style-type: none"> <li>Clear Password Jumper</li> </ul>	<ul style="list-style-type: none"> <li>DIMM Connectors for easy Upgrade</li> </ul>
<ul style="list-style-type: none"> <li>Restore CD</li> </ul>	<ul style="list-style-type: none"> <li>Clear CMOS Switch</li> </ul>	<ul style="list-style-type: none"> <li>NIC LEDs (integrated) (Green &amp; Amber)</li> </ul>

Serviceability Features of Chassis		
<ul style="list-style-type: none"> <li>Dual Color Power and HD LED - To Indicate Normal Operations and Fault Conditions</li> </ul>	<ul style="list-style-type: none"> <li>Color coordinated cables and connectors</li> </ul>	<ul style="list-style-type: none"> <li>Tool-less Hood Removal (thumbscrews for Microtower, spring-loaded latch for Small Form Factor)</li> </ul>
<ul style="list-style-type: none"> <li>Front power switch</li> </ul>	<ul style="list-style-type: none"> <li>System memory can be upgraded on Microtower without removing any internal components</li> </ul>	<ul style="list-style-type: none"> <li>Tool-less Hard Drive, CD &amp; Diskette Removal</li> </ul>
Additional Features		
Towerable	Description	
	Small Form Factor can be oriented as a tower (in addition to desktop orientation)	
Drive Self Tests (DPS)		
	<ul style="list-style-type: none"> <li>Drive Protection System</li> <li>A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> <li>Running independently of the operating system, it can be accessed through a Windows-based diagnostics utility or through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> <li>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures.</li> </ul>	
DPS Access through F10 Setup during Boot		
	<ul style="list-style-type: none"> <li>Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count</li> <li>By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure</li> </ul>	
5" * Technology * (S * storing, Analysis and Reporting Technology)		
	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted	
	<ul style="list-style-type: none"> <li>Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count</li> <li>By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure</li> </ul>	
DASH 1.1 support (Desktop and Mobile Architecture for System Hardware)		
	A standards initiative for representing out-of-band management capability for computer systems. It is a secure, web-services based successor to ASF.	



DA - 13412 North America — Version 24 — April 12, 2011

Page 21

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Audio

High Definition Audio	Type	Integrated
	High Definition Stereo Codec	Yes - 2-channel Realtek ALC261 codec
	Audio Jacks	Front microphone-In (150-K ohm Input Impedance) Rear Line-In/Microphone input (150-K ohm Input Impedance, function is configurable by audio driver) Rear Line-Out* (190 ohms Output Impedance, expects at least a 10-K ohm load) Front Headphone-Out (0.5 Ohm Output Impedance, expects at least a 32 ohm load)
	NOTES:	Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.
		The rear input port can function as a Line-In or Microphone-In jack.
		The front Microphone jack is retaskable to support headphones. When functioning as a headphone jack the same audio stream will be sent to both front jacks.
		The front Microphone jack is also retaskable to function as a Line-in jack.
		The Realtek Control Panel software required to reassign audio ports is preloaded but must be installed by the customer before these functions can be performed.
	Multistreaming Capable	Multistreaming can be enabled in the Realtek control panel to allow independent audio streams to be sent to/from the front and rear jacks.
	Sampling	8 kHz - 192 kHz
	Wavetable Syntheses (software)	Yes - Uses OS soft wavetable
	Analog Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes; ability to mute internal speaker through F10 Setup
	External Speaker Jack (Line-Out)	Yes



DA - 13412 North America — Version 24 — April 12, 2011

Page 23

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications

ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system environments
---	---



DA - 13412 North America — Version 24 — April 12, 2011

Page 22

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Communications

Integrated Broadcom NetXtreme Gigabit Ethernet BCM 5761	Connector	RJ-45
	Controller	Broadcom 5761 PCI-Express LAN Controller
	Memory	8 MB NVRAM serial Flash
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, 802.3i, and 802.3x
	Bus architecture	PCI-E
	Data path width	Single channel, PCI-E
	Data transfer mode	Bus-master DMA
	Power requirement	1.8W @ 3.3V
	Boot ROM support	Yes
	Network transfer mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
	Environmental	Operating temperature 32° to 131°F (0° to 55° C) Operating humidity 131° F (55° C) with 5% to 95% non-condensing humidity
	Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.1, WIM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles
Broadcom NetXtreme Gigabit Ethernet Plus PCIe NIC Card	Connector	RJ-45
	Controller	Broadcom 5761 PCI-Express LAN Controller
	Memory	8 MB NVRAM serial Flash
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, 802.3i, and 802.3x
	Bus architecture	PCI-E
	Data path width	Single channel, PCI-E
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	Power requirement	1.8W @ 3.3V
	Boot ROM support	Yes
	Network transfer mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)



DA - 13412 North America — Version 24 — April 12, 2011

Page 24



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Communications

Network transfer rate	10BASE-T (half-duplex) 10 Mbps
	10BASE-T (full-duplex) 20 Mbps
	100BASE-TX (half-duplex) 100 Mbps
	100BASE-TX (full-duplex) 200 Mbps
	1000BASE-T (full-duplex) 2000 Mbps (actual rate limited by PCI Bus)
Environmental	Operating temperature 32° to 131°F (0° to 55° C)
	Operating humidity 131° F (55° C) with 5% to 95% non-condensing humidity
Dimensions	2.75 in x 4.13 in (7 cm x 10.5 cm), low profile compatible
Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles

HP 802.11 b/g/n Wireless PCIe x1 Card	Dimensions (L x H)	3.3 x 4.7 inches (8.5 x 12 cm)	
	Weight	0.08 pounds (40 g)	
	Controller	Ralink RT2790	
	System interface	PCI Express x1	
	Network standard	802.11 b/g/n	
	Frequency band	2.400 - 2.497 GHz	
	Operating temperature	14° to 149°F, operating (-10° to 65°C, operating)	
	Storage temperature	-40° to 176°F, non-operating (-40° to 80°C, non-operating)	
	Humidity	10-90% operating 5-95% non-operating	
	Operating voltage	3.3V +/- 9% 12V +/- 8%	
	Power consumption	Platform/WLAN Mode	Power Consumption
		Maximum Power Consumption	10 Watts
		Transmit Only	4 Watts maximum averaged power over 1 second
		Transmit Packet or Active Scanning	1000 mA peak current for 100 microseconds or longer
		Receive Only Mode or Idle without IEEE PSP mode enabled	3 Watts maximum averaged over 1 second
Idle, with IEEE PSP mode enabled		1.0 Watts maximum averaged over 1 second	
Transmit Disabled (turned off in software)		50 mW maximum, averaged over 1 second	
Platform in S3 or S4 (power removed from Low Profile PCI Express Card)		5 mW maximum, averaged over 1 second	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Communications

Output power (approximately)	802.11b modes +19 dBm +/- 1.0 dB maximum	802.11g modes +17 dBm +/- 1.0 dB maximum	EVC modes +17 dBm +/- 1.0 dB maximum (total power in all transmit chains)	
	Receive sensitivity	Mode	Data rate	Sensitivity
		802.11b	1 Mbps	-94 dBm
		802.11b	11 Mbps	-85 dBm
		802.11g	6 Mbps	-91 dBm
		802.11g	18 Mbps	-85 dBm
		802.11g	48 Mbps	-75 dBm
		802.11g	54 Mbps	-72 dBm
		EVC (2.4 GHz)	6.5 Mbps	-87 dBm
		EVC (2.4 GHz)	54 Mbps	-82 dBm
EVC (2.4 GHz)		81 Mbps	-78 dBm	
EVC (2.4 GHz)	162 Mbps	-74 dBm		
EVC (2.4 GHz)	270 Mbps	-68 dBm		
EVC (2.4 GHz)	300 Mbps	-64 dBm		
Data transfer rate	Data Rate (MCS)	Minimum Throughput		
	1 Mbps (802.11 b)	700 kbps		
	2 Mbps (802.11 b)	1.4 Mbps		
	5.5 Mbps (802.11 b)	3.5 Mbps		
	11 Mbps (802.11 b)	5.9 Mbps		
	12 Mbps (802.11 g)	6 Mbps		
	18 Mbps (802.11 g)	9 Mbps		
	24 Mbps (802.11 g)	12 Mbps		
	36 Mbps (802.11 g)	18 Mbps		
	48 Mbps (802.11 g)	21 Mbps		
	54 Mbps (802.11 g)	22.5 Mbps		
	6.5 Mbps (20 MHz EVC)	4.5 Mbps		
	13 Mbps (20 MHz EVC)	9 Mbps		
	19.5 Mbps (20 MHz EVC)	13.5 Mbps		
	26 Mbps (20 MHz EVC)	18 Mbps		
39 Mbps (20 MHz EVC)	27 Mbps			
52 Mbps (20 MHz EVC)	36 Mbps			
58.5 Mbps (20 MHz EVC)	40 Mbps			
65 Mbps (20 MHz EVC)	45 Mbps			
78 Mbps (20 MHz EVC)	54 Mbps			
104 Mbps (20 MHz EVC)	72 Mbps			
117 Mbps (20 MHz EVC)	81 Mbps			



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Communications

	130 Mbps (20 MHz EVC)	91 Mbps
	13.5 Mbps (40 MHz EVC)	8 Mbps
	27 Mbps (40 MHz EVC)	16 Mbps
	40.5 Mbps (40 MHz EVC)	24 Mbps
	54 Mbps (40 MHz EVC)	32 Mbps
	81 Mbps (40 MHz EVC)	48 Mbps
	108 Mbps (40 MHz EVC)	64 Mbps
	121.5 Mbps (40 MHz EVC)	72 Mbps
	135 Mbps (40 MHz EVC)	81 Mbps
	Security	<ul style="list-style-type: none"> <li>IEEE and WiFi compliant 64 / 128 bit WEP encryption</li> <li>AES: CCM</li> <li>802.1x authentication</li> <li>WPA: 802.1x, WPA-PSK and TKIP</li> <li>WPA2 certification</li> <li>IEEE 802.11i</li> <li>Cisco Certified Extensions, all versions through V5</li> </ul>
Antenna		HP part number 497792-001
Certifications		Wi-Fi certified
Certifications for use by country		United States, Canada, Peru, Taiwan

LSI PCIe x1 56K International SoftModem	Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
	Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V.17, V.29, V.27ter, and V.21 Channel 2
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	PCI Bus Power Management Interface Specification (PCI-PM) Revision 1.2, Appendix A, D0, D3hot, and D3cold. Wake on Ring state when in D3cold. If the power management event (PME) feature is enabled in D3cold, a modem can wake the system via WAKE# (WAKEN) or beacon. Meets PCI Express 1.1 standard.
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Communications

Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
Operating Temperature	32° to 158° F (0° to 70° C)
Operating Humidity	20% to 90%, non-condensing
Power	Requires a 3.3-V auxiliary power rail on PCI express bus Uses only one PCI express load (i.e., one grant/request pair), one shared IRQ, one electrical load
Chipset	LSI SV92EX - Integrated PCI interface with 3.3-V tolerant buffers and CardBus support
Dimensions (L x H)	Complies with PCI express low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
Connection	Single RJ-11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark)
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada), Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Other	The SV92EX device is packaged in a 32-pin micro leadless chip carrier (MLCC). The SV92EX is fully compliant with the PCI Express revision 1.1 specification. WHQL approved, ASPM compliant.



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

Integrated ATI HD 4200 Graphics	Memory Controller Clock Speed	Variable and User selectable in BIOS settings		
	Maximum Color Depth	32 bpp		
Resolutions Supported	Multi-display Support	Yes		
	Graphics/Video API Support	DX10, OpenGL 2.0		
	Output connectors	1 VGA, 1 DisplayPort (Multi-Mode (DP+) 1.1a compliant)		
	VGA DAC Frequency	400 MHz		
Resolutions Supported	Resolution	Maximum Refresh Rate (Hz)		
		Analog Connection	Digital Connection	
		640x480	85	60
		800x600	85	60
		1024x768	85	60
		1280x720	85	60
		1280x1024	85	60
		1440x900	75	60
		1600x1200	85	60
		1680x1050	75	60
		1920x1080	85	60
		1920x1200	85	60
		1920x1440	85	60
		2048x1536	75	60
		2560x1600	75	60

ATI Radeon HD 4650 (1 GB DH) PCIe x16 Graphics Card (FH Only)	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2560 x 1600 digital, 2048 x 1536 analog	
	Board display options	Supports two displays through any combination of two of the three output ports.	
Board configuration	Specification	Description	
	Graphics Chip	RV730Pro	
	Core clock	600 MHz	
	Memory clock	500 MHz	
	Frame buffer	1 GB DDR3, 128 bit wide	
Maximum power	55 W		
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish		
Compliance standards	EMC Emissions:		

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

a) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment

EMC Immunity: CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement

ATI Radeon HD 4650 (1 GB) PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as the may not have been tested and qualified by HP

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R*
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60**

\* Max HDMI resolution is 1080p  
\*\* Only supported when using a dual-link DVI connection  
NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

ATI Radeon HD 4550 (256 MB DH) PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	1900 x 1200 digital, 2048 x 1536 analog	
	Board display options	Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI cable kit part number: DL139A. 4-pin mini-DIN S-video connector for TV output	
Board configuration	Specification	Description	
	Graphics Chip	RV710	
	Core clock	600MHz	
	Memory clock	800 MHz	
	Frame buffer	256 MB DDR2, 64 bit wide	
Languages supported	24 languages: English, Arabic, Chinese Simplified, Chinese Traditional, Czechoslovakian, Danish, Dutch, Finnish, French, German, Greek, Hebrew, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Thai, Turkish		

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

Compliance standards	EMC Emissions:	a) FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use	
		b) CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment	
		c) Canadian Standard ICES-003 is equivalent to CISPR22	
		d) Taiwanese Standard BSMI	
		e) Japanese VCCI	
		f) Australian C-Tick	
		g) Korean (KCC)	
		EMC Immunity:	CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

ATI Radeon HD 4550 DH PCIe x16 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as the may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

NVIDIA GeForce 310 DP PCIe x16 Graphics Card	Bus type	PCI Express (x16 lanes)	
	Maximum vertical refresh rate	85 Hz	
	Display support	Integrated 400 MHz RAMDAC	
	Display max resolution	2560x1600 digital, 2048 x 1536 analog	
	NVIDIA GeForce 310 DP PCIe x16 Graphics Card display resolutions and refresh rates	NOTE: Other resolutions may be available but are not recommended as the may not have been tested and qualified by HP.	

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	60*

\* Only supported when using a dual-link DVI or DP connection.  
NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

Board display options	Supports two displays via the DisplayPort and DVI connectors	
Board configuration	Specification	Description
	Graphics Chip	RV620
	Core clock	750 MHz
	Memory clock	500 MHz
	Frame buffer	512 MB DDR3, 64 bit wide
Audio Support (through HDMI only)	Integrated HD Audio codec supports linear PCM and Dolby® Digital (7.1) audio formats for HDMI output	
Operating systems support	Windows 7 Home Basic*, Windows 7 Home Premium*, Windows 7 Professional Edition 32*, Windows 7 Professional Edition 64*, Windows 7 Ultimate Edition 32*, Windows 7 Ultimate Edition 64*, Windows Vista Business 32*, Windows Vista Business 64*, Windows Vista Home Basic 32*, Windows Vista Home Basic 64*, Windows XP Professional or Windows XP Home 32*.	

\*This system may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

Windows 7 Business disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.

† Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

Linux x86 and x86\_64 distributions using XFree86 or X.Org†.

†Linux drivers are available from ATI's website and may be available in a Linux distribution. Refer to the Open Source and Linux from HP website: <http://www.hp.com/wwsolutions/linux/products/clients/> for support information.

**Core power** 22 W (max)

**Dimensions (H x D)** 2.71 in x 6.60 in (68.90 mm x 167.65 mm)

**Weight** 0.30 lb (134.3 g)

**Option kit contents**

- NVIDIA GeForce 310 DP PCIe x16 Graphics Card with full height bracket attached
- DVI to VGA adapter
- Software CD with graphics drivers
- Low profile bracket to convert the card for using in a low profile chassis
- Warranty documentation

**Compliance standards**

**EMC Emissions:**

- FCC Part 15, Subpart B - Unintentional Radiators, Class B Computing Devices for Home & Office Use
- CISPR22: 1997/EN 55022:1998 - Class B - Limits and methods of measurement of radio disturbance characteristics of Information Technology Equipment
- Canadian Standard ICES-003 is equivalent to CISPR22
- Taiwanese Standard BSMI
- Japanese VCCI
- Australian C-Tick
- Korean (MIC)

**EMC Immunity:**

CISPR 24:1997/EN 55024:1998 - Information Technology Equipment - Immunity Characteristics - Limits and Methods of Measurement.

**NVIDIA Quadro NVS 290 Bus type** PCIe x1

**PCIe x1 Graphics Card**

**Graphics Controller** Integrated Quadro 290 2D graphics processor unit (GPU)

**Memory** 256 MB DDR2

**Connector** Single high-density DMS-59 Flex Connector

**Dimensions** Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)

**Multi-monitor support** Dual analog or digital (Single Link DVI) monitors (DVI support requires optional DVI cable kit DL139A)

**RAMDAC** Dual 350 MHz (integrated)

**Maximum pixel clock** 350 MHz

**Overlay planes** One 1-bit Video overlay plane

**High-definition Video Processor (HDVP)** Full screen, full frame video playback of HDTV and DVD content  
DVD-ready motion compensation for MPEG-2  
Independent hardware color controls for video overlay  
Hardware color-space conversion (YUV 4:2:2 and 4:2:0)  
IDCT motion compensation  
5-tap horizontal by 3-tap vertical filtering  
8:1 up/down scaling



DA - 13412 North America — Version 24 — April 12, 2011

Page 33

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

**nView architecture** Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.

**Multi-Monitor support** Dual monitor support

**DVI support** DMS-59 (to dual DVI-SL)

**High-definition Video Processor (HDVP)** Full-screen, full-frame video playback of HDTV and DVD content  
DVD-ready motion compensation for MPEG-2  
Independent hardware color controls for video overlay  
Hardware color-space conversion (YUV 4:2:2 and 4:2:0)  
IDCT motion compensation  
5-tap horizontal by 3-tap vertical filtering  
8:1 up/down scaling

**Supported graphics APIs** OpenGL 2.1 & DX10 Support; Shader Model 4.0

**NVIDIA Quadro NVS 295 Form Factor** 2.731 inches (H) x 6.600 inches (L), Half-Height

**(256MB DH) PCIe x16 Graphics Card**

**Graphics Controller** NVIDIA Quadro NVS 295 Graphics Board

**Bus Type** PCI Express x16, Generation 2.0

**Memory** 256 MB GDDR3 SDRAM unified graphics memory

**Connectors** 2 DisplayPort  
Comes with 2 DisplayPort to VGA Adapters (DisplayPort to DVI-D\* and DisplayPort to DL DVI-D adapters available as an accessory)

**Maximum Resolution** Two DisplayPort outputs drive two digital displays up to 2560 x 1600

**Display Output**

- Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking
- Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking (through DisplayPort to DVI-D (single link) cable)

**Supported Graphics APIs** OpenGL 3.0  
DirectX 10.0

**HP DisplayPort to DVI-D Adapter**

**Connectors** DisplayPort and DVI-D single link connector

**Adapter length** 7.5 in (19.0 cm)

**Adapter weight** .10 lbs (.05 kg)



DA - 13412 North America — Version 24 — April 12, 2011

Page 35

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

**Input/Output connectors** DMS-59

**Board display options** Supports two displays via included DMS-59 to dual VGA cable or 2 DVI monitors via optional DMS-59 to dual DVI-I single-link connectors cable kit part number: DL139A.

**Board configuration**

Specification	Description
Description	G86-825
Core clock	460 MHz
Memory clock	400 MHz
Frame buffer	256 MB DDR2, 64 bit wide

NVIDIA Quadro NVS 290 PCIe x1 Graphics Card display resolutions and refresh rates

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP.

Resolution	Maximum Refresh Rate (Hz)	
	Analog Connection	Digital Connection
640x480	85	60
800x600	85	60
1024x768	85	60
1280x720	85	60
1280x1024	85	60
1440x900	75	60
1600x1200	85	60
1680x1050	75	60
1920x1080	85	60-R
1920x1200	85	60-R
1920x1440	85	N/A
2048x1536	75	N/A
2560x1600	N/A	N/A

NOTE: 60-R denotes reduced blanking timings are used on single-link DVI connections and may be used with other digital connections.

**NVIDIA Quadro NVS 290 Form Factor** Low Profile

**256MB Dual Head PCIe x16 Graphics Card**

**Bus Type** PCIe x16

**Memory** 256 MB 400MHz DDR2 SDRAM unified frame buffer, Z-buffer and Texture storage

**Connector** DMS-59, includes DMS-59 to Dual DVI-I cable. DMS-59 to Dual VGA cable available as an option.

**Display Resolution Support** Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1920x1200 (single-link).  
nVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows

**RAMDAC** Integrated dual 400MHz

**Color planes** 32-bit color buffer

**Overlay planes** Hardware supported



DA - 13412 North America — Version 24 — April 12, 2011

Page 34

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Graphics

**HP DisplayPort to VGA Adapter**

**Connectors** DisplayPort and VGA connector

**Adapter length** 8 in (20 cm)

**Adapter weight** .1 lbs (.06 kg)

**Maximum vertical refresh rate** 85 Hz

**Display support** 162 MHz RAMDAC

**Display max resolution** 1600x1200

**HP DisplayPort to VGA adapter display resolutions and refresh rates**

NOTE: Other resolutions may be available but are not recommended as they may not have been tested and qualified by HP. Using the HP DisplayPort to VGA Adapter may require an update to the graphics driver installed on your system. To install the most up-to-date graphics driver go to: [www.hp.com](http://www.hp.com).


Resolution	Max refresh rate
640x480	85
800x600	85
1024x768	85
1280x720	85
1280x1024	85
1440x900	75
1600x1200	60
1680x1050	60
1920x1080	60-R
1920x1200	60-R

NOTE: 60-R denotes reduced blanking timings are used. Not all monitors support reduced blanking timing.



DA - 13412 North America — Version 24 — April 12, 2011

Page 36



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Internal Storage

7200 RPM Serial ATA Hard Drives	500-GB	Capacity	500,107,862,016 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	16 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
			Average	11 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	976,773,168	
		Operating Temperature	41° to 131° F (5° to 55° C)	
	250-GB	Capacity	250,059,350,016 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms
			Average	8.5 ms
			Full-Stroke	18 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	488,397,168	
		Operating Temperature	41° to 131° F (5° to 55° C)	

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Internal Storage

10,000 RPM Serial ATA Hard Drives	80-GB	Capacity	80,026,361,856 bytes	
		Height	1 in (2.54 cm)	
		Width	Media diameter: 2.5 in (6.35 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
		Synchronous Transfer Rate (Maximum)	Up to 3.0 Gb/s	
		Cache	16 Mbytes	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms
			Average	4.6 ms
			Full-Stroke	10.2 ms
		Rotational Speed	10,000 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	41° to 131° F (5° to 55° C)	
	2.5" 7200 RPM Serial ATA Hard Drives	Capacity	250,059,350,016 bytes	
		Height (Nominal)	0.374 in (9.5 mm)	
		Width (Nominal)	Media diameter: 2.5 in (63.5 mm) Physical size: 2.75 in (70 mm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Cache	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2.0 ms
			Average	12 ms
			Full-Stroke	22 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	488,397,168	
		Operating Temperature	41° to 131° F (5° to 55° C)	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Internal Storage

64 GB Solid State Drive	Capacity	64 GB	
	NAND Flash Memory	Multi Level Cell (MLC) with wear leveling controller	
	Interface type	SATA 3Gb/sec	
	Dimensions-external (W x H x D)	2.74 x 0.37 x 4 in (6.98 x 0.95 x 10.2 cm)	
	Weight	0.14 lb (65 g)	
	Internal transfer rate	Write speed	Up to 220 MB/s
		Read speed	Up to 120 MB/s
	Host transfer rate	Ultra DMA mode	Up to 150 MB/s
	Power	DC power requirement	5 VDC 5%-100 mV ripple p-p
		Total power consumption	<1.12Watt
	Environmental (all conditions, non-condensing)	Temperature (operating)	32° to 158° F (0° to 70° C)
		Relative Humidity (operating)	5% to 95%
		Maximum Wet Bulb Temperature (operating)	84° F (29° C)
	Regulations	UL, CSA, EN 60950-2000, CISPR Pub 22 Class B, CNS 13438, AS/NZS CISPR 22:2002 Class B, R1113 and C1172 Class B	

\* For solid state disk drives, GB means 1 billion bytes. 16GB is the unformatted capacity of this drive before a portion of the drive is reserved for flash management features. Actual capacity varies by content and will be less than 15.8GB.

# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Input/Output Devices

USB Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)	
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)	
		Weight	2 lb (0.9 kg) minimum	
	Electrical	Operating voltage	+ 5VDC ± 5%	
		Power consumption	50-mA maximum (with three LEDs ON)	
		System interface	USB Type A plug connector	
		ESD	CE level 4, 15-kV air discharge	
		EMI - RFI	Conforms to FCC rules for a Class B computing device	
	Mechanical	Microsoft® PC 99 - 2001	Functionally compliant	
		Languages	38 available	
		Keycaps	Low-profile design	
		Switch actuation	55-g nominal peak force with tactile feedback	
		Switch life	20 million keystrokes (using Hasco modified tester)	
		Switch type	Contamination-resistant switch membrane	
		Key-leveling mechanisms	For all double-wide and greater-length keys	
		Cable length	6 ft (1.8 m)	
		Microsoft PC 99 - 2001	Mechanically compliant	
	Environmental	Acoustics	43-dBA maximum sound pressure level	
		Operating temperature	50° to 122° F (10° to 50° C)	
		Non-operating temperature	-22° to 140° F (-30° to 60° C)	
		Operating humidity	10% to 90% (non-condensing at ambient)	
		Non-operating humidity	20% to 80% (non-condensing at ambient)	
		Operating shock	40 g, six surfaces	
		Non-operating shock	80 g, six surfaces	
		Operating vibration	2-g peak acceleration	
		Non-operating vibration	4-g peak acceleration	
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC		
	Ergonomic compliance	ANSI/HFS 100, ISO 9241-4, and TUVGS		
	Kit contents	Keyboard, installation guide, warranty card, safety and comfort guide		



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Input/Output Devices

PS/2 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
	Electrical	Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC ± 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	PS/2 6-pin mini din connector
	Mechanical	ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
Keycaps		Low-profile design	
Switch actuation		55-g nominal peak force with tactile feedback	
Environmental	Switch life	20 million keystrokes (using Hasco modified tester)	
		Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys	
	Cable length	6 ft (1.8 m)	
	Microsoft PC 99 - 2001	Mechanically compliant	
	Acoustics	43-dBA maximum sound pressure level	
	Operating temperature	50° to 122° F (10° to 50° C)	
	Non-operating temperature	-22° to 140° F (-30° to 60° C)	
	Operating humidity	10% to 90% (non-condensing at ambient)	
	Non-operating humidity	20% to 80% (non-condensing at ambient)	
Approvals	Operating shock	40 g, six surfaces	
	Non-operating shock	80 g, six surfaces	
Ergonomic compliance	Operating vibration	2-g peak acceleration	
	Non-operating vibration	4-g peak acceleration	
Approvals	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence	
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence	
Ergonomic compliance	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC		
	ANSI HFS 100, ISO 9241-4, and TUVGS		

HP USB Smartcard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Form factor	USB basic Smart Card keyboard
Electrical	Colors	Carbonite/Silver	
	Dimensions (H x W x D)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)	
	Weight	2 lb (0.9 kg) minimum	
	Operating voltage	+ 5VDC ± 5%	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Input/Output Devices

Mechanical	Power consumption	100-mA maximum (with three LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	Microsoft PC 99 - 2001	Functionally compliant
	Languages	30+ available
	Keycaps	Low-profile design
	Switch actuation	55 g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Environmental	Switch type
Key-leveling mechanisms		For all double-wide and greater-length keys
Cable length		6 ft (1.8 m)
Microsoft PC 99 - 2001		Mechanically compliant
Acoustics		43-dBA maximum sound pressure level
Operating temperature		50° to 122° F (10° to 50° C)
Non-operating temperature		-22° to 140° F (-30° to 60° C)
Operating humidity		10% to 90% (non-condensing at ambient)
Non-operating humidity		20% to 80% (non-condensing at ambient)
Operating shock		40 g, six surfaces
SMARTCARD function	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Support	All ISO 7816 smart cards
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)
	Chipset	SCM STCII
	Standard APIs supported	PC/SC, EMV2000, SET
	Power	USB Port Short circuit detection (protects smart card and reader) Power supply compliant with ISO7816 and EMV (5V, 60 mA) Supports 3-V and 5-V cards
Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Input/Output Devices

HP PS/2 Optical Scroll Mouse	Communication	From card	Programmable from 9,600 baud to 115,200 baud
		From computer	Up to 38,400 baud
	Landing mechanism	Contact device	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	USB communications through USB port	
		Automatic card insertion/removal detection	
	Reader performance interface	USB connection	
	Electro-magnetic standards	Europe	89/336/CEE guideline
		USA	USAFCC part 15
	HP USB 2-Button Laser Mouse	Scroll Wheel	24
Maximum Rotation Speed			48 rats/sec
Switch Type		wheel	
		Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times
Environmental		Operating Temperature	32° to 104° F (0° to 40° C)
		Non-operating Temperature	-4° to 140° F (-20° to 60° C)
		Operating Humidity	10% to 90% (non-condensing at ambient)
		Non-operating Humidity	20% to 80% (non-condensing at ambient)
		Operating Shock	40 g, six surfaces
		Non-operating Shock	80 g, six surfaces
Electrical	Operating Vibration	2-g peak acceleration	
	Non-operating Vibration	4-g peak acceleration	
	Operating Voltage	+ 5VDC ± 5%	
	Power Consumption		
Mechanical	MTBF	> 150,000 hrs	
	ESD	IEC-61000-4-2 criteria B, Contact discharge: +/- 4kV, Air discharge: +/- 8kV	
	EMI-RFI	FCC Class B	
	PC98	PC 99 Compliant	
	Resolution	800dpi	
	Tracking Speed	25 cm/sec	
Mechanical	Acceleration	0.5mm	
	Switch Actuation	0.6N (60gf)	



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Input/Output Devices

Regulatory Approvals	Switch Life	Button - 3,000,000 Wheel - 1,000,000 times Tilt switch - 500,000 times		
	Cable Length	1850mm		
	PC98-99	PC99 compliant		
	UL60950-1, UL 94, UL 746 (A-E), UL 796			
	TUV/GS: EN 60950-1, EN 60825-1			
	FCC Class B, UL 1950, cUL, TUV GS, CE, C-Tick, VCCI, BSMI, RRL			
	HP PS/2 Optical Scroll Mouse	Dimensions (H x L x W)	3.95 x 6.21 x 11.7 cm (1.56 x 2.44 x 4.61 in)	
		Weight	4.44 oz (126 g)	
		Environmental	Operating temperature	-32° to 104° F (0° to 40° C)
			Non-operating temperature	-4° to 140° F (-20° to 60° C)
Electrical		Operating humidity	10% to 90% (non condensing at ambient)	
		Non-operating humidity	10% to 90% non condensing	
Mechanical		Operating shock	40 g, 6 surfaces	
		Non-operating shock	80 g, 6 surfaces	
Mechanical		Operating vibration	2 g peak acceleration	
		Non-operating vibration	4 g peak acceleration	
Mechanical	Drop (out of box)	80 cm height onto asphalt tile over concrete or equivalent, 5-drop in 5 direction except the cable face		
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence		
Scroll wheel	Operating voltage	5 VDC ± 10%		
	Power consumption	100mA		
	System consumption	PS/2 mini-din connector		
	ESD	CE level 4, 15 kV air discharge		
	EMI-RFI	Conforms to FCC rules for a Class B computing device		
	Microsoft PC99 - 2001	Functionally compliant		
	Resolution	400 ± 20% DPI		
	Tracking speed	10 in/s (25.4 cm/s) maximum		
	Acceleration	100 in/s/s (2.54 m/s/s)		
	Switch actuation	61 g nominal peak force		
Scroll wheel	Switch life	3,000,000 operations (using Hasco modified tester)		
	Switch type	Low force micro-switches		
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s		
	Cable length	6 ft (1.8 m)		
	Microsoft PC99 - 2001	Mechanically compliant		
	Width	8 mm		
	Diameter	1.01 in (25.6 mm)		
	Maximum rotation speed	48 rats/sec		



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Optical Storage

Power	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s - default)
	Source	SATA DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC - < 1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Maximum Wet Bulb Temperature	86° F (30° C)



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Removable Storage

Storage Environmental Extremes	50°C 10% R.H. = 24 hours
	Test Parameters/Conditions 140°F (60°C) @ 80% R.H. for 96 hours -22°F (-30°C) @ 20% R.H. for 48 hours No power applied Delta °C < 1.0°C/min Delta % R.H. < 1.5% R.H./min
Approvals	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3 FCC, CE, BSMi, C-Tick, VCCI, MIC, cUL, TUV-T



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Removable Storage

HP 22-in-1 (with 1394) Media Card Reader	USB Interface	USB 2.0 High-speed interface
	1394 Interface	NOTE: Requires the USB cable to be connected to the external USB 2.0 port or a USB 2.0 PCI card. Two IEEE-1394a external ports; 1 IEEE-1394a internal port (connects to the pass through cable on the media card reader)
	Advance protocol support	<ul style="list-style-type: none"> <li>Supports hardware ECC (Error Correction Code) function</li> <li>Supports hardware CRC (Cyclic Redundancy Check) function</li> <li>Supports MS 4-bit parallel transfer mode</li> <li>Supports MS PRO 4-bit parallel transfer mode</li> <li>Supports MS PRO-HG Duo 4-bit parallel transfer mode</li> <li>Supports SD 4-bit parallel transfer mode</li> <li>Supports high-speed 50MHz SD 4-bit card (version 2.0)</li> <li>Supports high-speed 52MHz MMC 8-bit card (version 4.2)</li> <li>Supports CF v4.0 with PIO mode 6 and Ultra DMA mode</li> </ul>
	Supported media type	<ul style="list-style-type: none"> <li>CompactFlash Type I</li> <li>CompactFlash Type II</li> <li>Microdrive</li> <li>MultiMediaCard (MMC)</li> <li>Reduced Size MultiMediaCard (RS MMC)</li> <li>MultiMediaCard 4.2 (MMC Plus, including MMC Plus HC)</li> <li>Reduced Size MultiMediaCard 4.2 (MMC Mobile, including MMC Mobile HC)</li> <li>Secure Digital Card (SD)</li> <li>Secure Digital High Capacity (SDHC)</li> <li>miniSD</li> <li>miniSD High Capacity</li> <li>Micro SD (T-Flash)</li> <li>Micro SD HC</li> <li>Memory Stick</li> <li>Memory Stick Select</li> <li>Memory Stick Duo (MS Duo)</li> <li>Memory Stick PRO (MS PRO)</li> <li>Memory Stick PRO Duo (MS PRO Duo)</li> <li>Memory Stick PRO-HG Duo</li> <li>MagicGate Memory Stick (MG)</li> <li>MagicGate Memory Stick Duo</li> <li>xD-Picture Card</li> <li>Memory Stick Micro (M2)</li> <li>MMC Micro</li> </ul>
	Supported media type with card adapter	
Operational Environmental	Environmental Extremes	Test Parameters/Conditions - Power applied, unit operating on system ±5% nominal supply voltage. 10°C 10% R.H. = 24 hours 10°C 90% R.H. = 24 hours 20°C 90% R.H. = 24 hours 30°C 90% R.H. = 24 hours 40°C 90% R.H. = 24 hours 50°C 90% R.H. = 24 hours



# QuickSpecs

HP Compaq 6005 Pro Business PC

## Technical Specifications - Environmental Data

### Microtower

Eco-Label Certifications and declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Microtower model is based on a typically configured product.

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	31.3720 W	32.1179 W	31.8169 W
Sleep (Energy Star low power mode)	2.4746 W	2.6361 W	2.4347 W
Off	0.7153 W	0.8560 W	0.6980 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	107 BTU/hr	110 BTU/hr	109 BTU/hr
Sleep	8 BTU/hr	9 BTU/hr	8 BTU/hr
Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.8	27
Fixed Disk (random writes)	3.8	28

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)  
Battery type: Li Ion

### Additional Information

- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
- This product is in compliance with California Proposition 65 (State of California Proposition 65) Water and Toxic Enforcement Act of 1986.
- This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level. [www.epeat.net](http://www.epeat.net)
- Plastics parts weighing over 25 grams used in the product are marked per ISO 11469.



## Technical Specifications - Environmental Data

ISO1043.

- This product contains 0% post consumer recycled plastic (by wt.)
- This product is 91.4% recyclable when properly disposed of at end of life.

Packaging Materials	External	Internal
Corrugated Paper	1835 g	
Polyethylene low density solid		150 g
Polyethylene low density foam		20 g

- The Polyethylene low density foam packaging material is made from 100% recycled content.
- The Polyethylene low density Solid packaging material is made from 100% recycled content.
- The corrugated packaging material contains at least 30% recycled content.

### Small Form Factor

Eco-Label Certifications & This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Small Form Factor model is based on a typically configured product.

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	27.4159 W	27.1680 W	27.7080 W
Sleep (Energy Star low power mode)	2.5527 W	2.7644 W	2.5316 W
Off	0.7149 W	0.8667 W	0.7003 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	94 BTU/hr	93 BTU/hr	95 BTU/hr
Sleep	9 BTU/hr	9 BTU/hr	9 BTU/hr
Off	2 BTU/hr	3 BTU/hr	2 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
	3.8	27
Fixed Disk (random writes)	3.9	28



## Technical Specifications - Environmental Data

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	22.01 W	22.56 W	23.13 W
Sleep (Energy Star low power mode)	3.03 W	3.07 W	3.04 W
Off	0.92 W	0.96 W	0.91 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	75 BTU/hr	77 BTU/hr	79 BTU/hr
	10 BTU/hr	10 BTU/hr	10 BTU/hr
	3 BTU/hr	3 BTU/hr	3 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.9	29
Fixed Disk (random writes)	3.9	29

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: BR2032 (coin cell)  
Battery type: Lithium

- Additional Information
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
  - This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
  - This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
  - This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)
  - Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
  - This product contains 5.6% post consumer recycled plastic (by wt.)
  - This product is 95% recyclable when properly disposed of at end of life.

Packaging Materials	External	Internal
Corrugated Carton	958 g	
Corrugated	465 g	
Polyethylene low density foam		30 g
Molded Pulp		250 g



## Technical Specifications - Environmental Data

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

Battery size: CR2032 (coin cell)

Battery type: Li Ion

- Additional Information
- This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.
  - This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
  - This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).
  - This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see [www.epeat.net](http://www.epeat.net)
  - Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.
  - This product contains 0% post consumer recycled plastic (by wt.)
  - This product is 95.1% recyclable when properly disposed of at end of life.

Packaging Materials	External	Internal
Corrugated Carton	1705 g	
EPE-Expanded Polyethylene		198 g
Polyethylene low density foam		39 g

- The EPE-Expanded Polyethylene packaging material is made from 100% recycled content.
- The Polyethylene low density foam packaging material is made from 100% recycled content.
- The Corrugated Carton packaging materials contains at least 75% recycled content.

### Ultra-Slim Desktop

Eco-Label Certifications & This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country.

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data for the Ultra-Slim Desktop model is based on a typically configured product



## Technical Specifications - Environmental Data

- The Corrugated Carton packaging material is made from 31% recycled content.
- The Corrugated packaging material is made from 100% recycled content.
- The Polyethylene low density foam packaging material is made from 31% recycled content.
- The Molded Pulp packaging material is made from 100% recycled content.

### Microtower, Small Form Factor, and Ultra-Slim Desktop

RoHS Compliance Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. By July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption under the EU RoHS Directive).

Material Usage This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at [http://www.hp.com/hpinfo/global/citizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/global/citizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Hologated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBDEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

Nickel finishes that release greater than 0.5 micro-grams/cm<sup>2</sup>/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

Packaging HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated fiberboard.
- Reduce size and weight of packages to improve transportation fuel efficiency.



## Technical Specifications - Environmental Data

End-of-life Management and Recycling

- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett-Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:  
Global Citizenship Report  
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>  
Eco-label certifications  
<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>  
ISO 14001 certificates:  
<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2011 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows 7 are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Phenom, Athlon and Sempron are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. All other product names mentioned herein may be trademarks of their respective companies.


The information contained herein is subject to change without notice and is provided 'as is' without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.



# QuickSpecs

HP L190hb 19-inch Widescreen LCD Monitor

## Overview

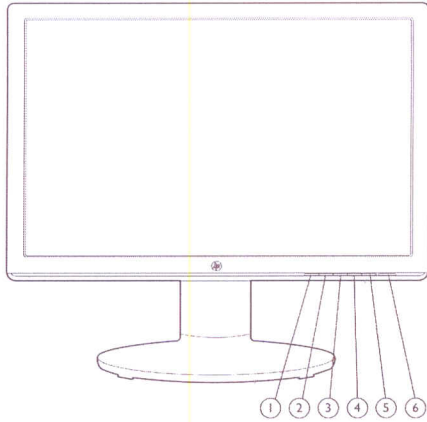

- |                 |   |               |   |
|-----------------|---|---------------|---|
| 1. 4:3 IN WIDE  | To select the image size of the screen.                                 | 4. Source [▲] | Use this button to select or adjust functions in the On Screen Display. |
| 2. MENU         | Use this button to enter or exit from the On Screen Display.            | 5. AUTO/SET   | Use this button to select an icon in the On Screen Display.             |
| 3. f-ENGINE [▼] | Use this button to select or adjust functions in the On Screen Display. | 6. Power      | Use this button to turn the display on or off.                          |

Model: WE12BAA#AC4



# QuickSpecs

HP L190hb 19-inch Widescreen LCD Monitor

## Technical Specifications

	1440 x 900 @ 75 Hz (Analog only)
Text Mode	720 x 400 @ 70Hz
Maximum Pixel Clock Speed	140 MHz
User Programmable Modes	Yes, (1)
Anti-Glare	Yes
Anti-Static	Yes
Default Color Temperature	sRGB, 6500K, 9300K
Video/Other Inputs	Plug and Play: Yes
Input Connectors	VGA and DVI-D (w/ HDCP support)
Input Impedance	75 ohms (R,G,B Line)
Sync Input	Separate TTL Sync, SOG (Sync On Green), Digital
Video Cable	One 15-pin D-sub (VGA)
Video Cable Lengths	1,5 m (4.9 ft.)
Power	Input Power: 100 - 240 VAC, 50 or 60Hz
Typical Power Consumption	22W
Maximum Power Consumption	26W
Power Saving	< 1W
Power Cable Length	1.8 m (5.91 ft.)
Mechanical	Dimensions (W x D x H)
	Unpacked w/stand: 448,4 x 241,6 x 401,45 to 511,45 mm (20.30 x 9.51 x 15.80 to 20.13 in.)
	Unpacked w/o stand (head only): 448,4 x 58,4 x 300,6 mm (20.30 x 2.29 x 11.83 in.)
	Packaged: 522 x 352 x 219 mm (20.55 x 13.86 x 8.62)
Weight	Unpacked: 4,51 kg (9.94 lb.)
	Packaged: 5,10 kg (11.24 lb.)
Tilt Range	-6° to +17°
Swivel Range	356°
Height Adjustable	Yes, 110 mm (4.33 in.)
Pivot Rotation	No
Base	Attachable, ships detached
Environmental	Temperature - Operating: 10° to 35° C (50° to 95° F)
	Temperature - Non-operating: -20° to 60° C (-4° to 140° F) non condensing
Humidity - Operating	10% to 80%
Humidity - Non-operating	5 to 90% non condensing
Altitude - Operating	+0 to 3,048m (10,000 feet)
Altitude - Non-operating	+12,192m (40,000 feet)
Options	HP USB Graphics: Enables connection of up to six simultaneous displays to help you boost



# QuickSpecs

HP L190hb 19-inch Widescreen LCD Monitor

## Technical Specifications

Panel	Type: 19-inch Wide-Aspect Active Matrix TFT (thin film transistor) (diagonal)	
	Viewable Image Area: 48,13 cm (19 in.) wide (WXGA+), diagonally measured	
	Screen Opening (W x H): 408,24 x 255,15 mm (16.07 x 10.05 in.)	
	Panel Type: TN	
	Aspect Ratio: 16:10	
	Viewing Angle (typical): Up to 170° horizontal/160° vertical (10:1 minimum contrast ratio)	
	Brightness (typical)*: 250 nits (cd/m <sup>2</sup> )	
	Contrast Ratio (typical)*: 1000:1	
	Dynamic Contrast Ratio (typical)*: 30000:1	
	Response Time (typical)*: 5 ms (on/off)	
	Pixel Pitch: 0.284 mm	
	Backlight Lamp Life (to half brightness): 50,000 hours	
	Color Gamut: 72%	
	*All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.	
On Screen Display (OSD) Controls	Buttons or Switches (OSD closed/OSD open): 6 button	
	Languages: 4:3 IN WIDE, Menu, F-engine(-), SOURCE(+), Auto/Set, Power	
	User Controls: 3 Languages (English, Spanish, Brazilian Portuguese)	
	1. 4:3 IN WIDE	
	2. Picture Controls - Brightness, Contrast, Gamma(-50/0/50)	
	3. Color Controls - Preset Colors(sRGB, 6500K, 9300K), User Color (Red, Green, Blue controls)	
	4. Tracking - Position(Horizontal, Vertical), Clock, Phase, Sharpness	
	5. Setup - Language, OSD Position(Horizontal, Vertical), White Balance, Power Indicator(on/off), Factory Reset	
	6. Flatron Engine - Movie, Internet, User(ACE,RCM), Normal, Demo	
	7. OSD Lock	
Signal Interface/Performance	Horizontal Frequency: 30 to 83 kHz	
	Vertical Frequency: 56 to 75 Hz	
	Native Resolution: 1440 x 900 @ 60 Hz	
	Preset VESA Graphic Modes (non-interlaced): 640 x 480 @ 60 Hz, 640 x 480 @ 75 Hz, 800 x 600 @ 60 Hz, 800 x 600 @ 75 Hz, 1024 x 768 @ 60 Hz, 1024 x 768 @ 75 Hz, 1280 x 1024 @ 60 Hz, 1280 x 1024 @ 75 Hz, 1440 x 900 @ 60 Hz	



# QuickSpecs

HP L190hb 19-inch Widescreen LCD Monitor

## Technical Specifications

Adapter-Part number	NLS71AA	productivity and multi-task across several open applications. Use one Adapter to bridge between a notebook or desktop PC and second monitor or use multiple Adapters to connect several displays to each other.
HP Business PC Security Lock Kit-Part number	PV606AA	Attaches to the rear of the PC with a six-foot steel cable that can be used to secure a PC or peripherals such as mice, keyboards, monitors or USB security devices to protect them against unauthorized removal by physically connecting the system to an anchor point.
		* The HP Quick Release has been designed to support a maximum of up to 24 lbs (10.9 kg) for all devices mounted. Because mounting surfaces vary widely and the final mounting method and configuration may vary, mounting fasteners are not supplied (other than the VESA-compliant screws). HP recommends that you consult with a qualified engineering, architectural or construction professional to determine the appropriate type and quantity of mounting fasteners required for your application and to ensure that your mounting solution is properly installed to support applied loads.
Other	Accessories Included: VGA cable and AC Power cable	
	Software: No	
	User Guide Languages: English, Spanish, Portuguese	
	Warranty Languages: English, Spanish, Portuguese	
	Color: Black	
	Security Lock-Ready: Yes	
Certification and Compliance	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:	
	<ul style="list-style-type: none"> <li>• US Energy Star®</li> <li>• TCO 5.0 Displays</li> <li>• CE Marking</li> <li>• CuL Marking</li> <li>• FCC Part 15 class B Approval</li> </ul>	
Compatibility	Compatible with platforms using the VESA 75mm standard.	
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. * With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.	
	* HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <a href="http://www.hp.com/go/lookuptool">www.hp.com/go/lookuptool</a> . Additional HP Care Pack Services information by product is available at: <a href="http://www.hp.com/hps/carepack">www.hp.com/hps/carepack</a> . Service levels and response times for HP Care Packs may vary depending on your geographic location.	

© Copyright 2010 Hewlett-Packard Development Company, L.P.

ENERGY STAR is a registered mark owned by the U.S. government. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

